


Fade® Gradient Colored Glass | Ultra-White & Custom Colors

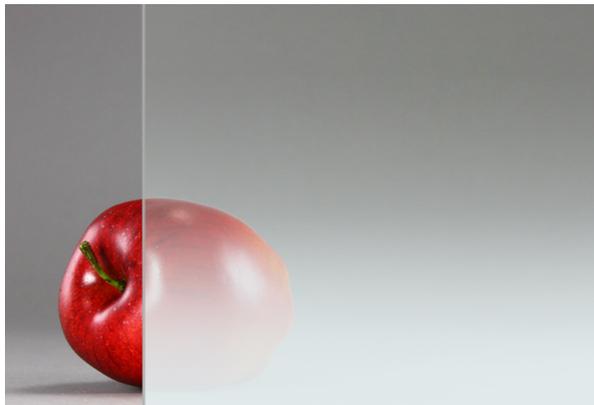

Application:

Interior

Composition:

Low-iron glass

Approx Dimensions:

Cut-to-size; max. size and thickness depend on application, up to 60" x 120" (1.5 m x 3 m); thicknesses = 1/4" (6 mm) and 1/2" (12 mm); available in larger sizes and thicknesses up to 3/4" (19 mm) by special order

Approx Weight:

Varies by thickness; ranges approx. 3 lb/ft² (14.5 kg/m²) to 6.5 lb/ft² (32 kg/m²)

Safety Options:

Laminated, Tempered_laminated

Maintenance:

Bendheim glass is easy to maintain. We suggest cleaning with warm water and a lint free cloth (terry cloth). Conventional non-abrasive glass cleaners may also be used.

Testing:

Bendheim safety glass meets the requirements for ANSI Z97.1 & the Consumer Product Safety Commission CPSC 16FR, Part 1201 - Safety Standard for Architectural Glazing Materials.

Potential Leed Credit:

- EA Credit 1: Optimize Energy Performance
- IEQ Credit 8.1: Daylight & Views: Daylight 75% of Spaces
- IEQ Credit 8.2: Daylight & Views: Views for 90% of Spaces