BENØHEIM

"Charcoal Grey" Colored Architectural Glass



Application:

Interior, Exterior

Composition:

Low-iron glass

Approx Dimensions:

Cut-to-size; max. size = 60" x 120" (1.5 m x 3 m); thickness = 5/16" (8 mm). Available in thicknesses up to 3/4" (19 mm) by special request.

Approx Weight:

4 lb/ft² (19.5 kg/m²)

Safety Options:

Laminated

Maintenance:

Bendheim glass is easy to maintain. We suggest cleaning with warm water and a lint free cloth (terry cloth). Conventional nonabrasive glass cleaners may also be used.

> Working on a project that requires customizing this product? Custom design is our specialty. Please contact your local Bendheim representative to discuss your project and vision.

BENØHEIM

Testing:

Bendheim safety glass meets the requirements for ANSI Z97.1 & the Consumer Product Safety Commission CPSC 16FR, Part 1201 – Safety Standard for Architectural Glazing Materials.


Potential Leed Credit:

- EA Credit 1: Optimize Energy Performance
- IEQ Credit 8.1: Daylight & Views: Daylight 75% of Spaces
- IEQ Credit 8.2: Daylight & Views: Views for 90% of Spaces

Working on a project that requires customizing this product? Custom design is our specialty. Please contact your local Bendheim representative to discuss your project and vision.

BENØHEIM

Options & Customizations:

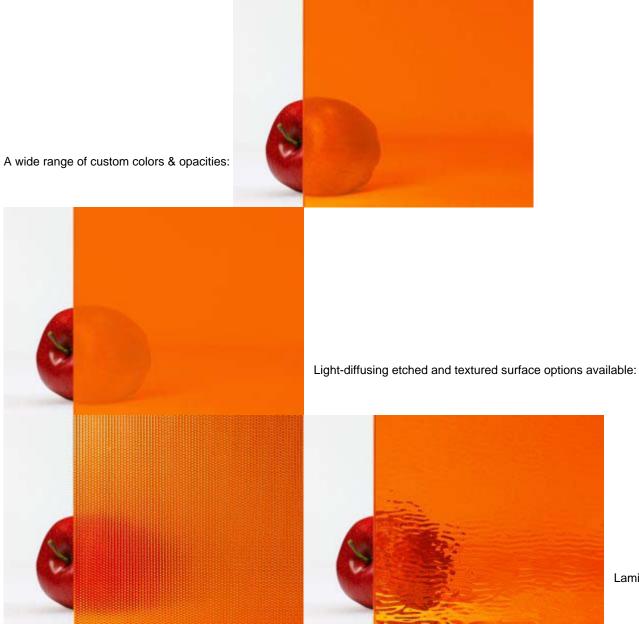

Laminated to

mirror for wall cladding applications Have a project requiring further customization? Please contact your local Bendheim representative to discuss your unique project and vision.

Working on a project that requires customizing this product? Custom design is our specialty. Please contact your local Bendheim representative to discuss your project and vision.