

“Tan Fibers” Decorative Laminated Glass



Application:

Interior

Composition:

Low-iron glass

Approx Dimensions:

Cut-to-size; max. size = 47" x 120" (1.2 m x 3 m); thickness = 1/4" (6 mm). Available in thicknesses up to 3/4" (19 mm) by special request.

Approx Weight:

3 lb/ft² (14.5 kg/m²)

Safety Options:

Laminated, Tempered_laminated

Maintenance:

Bendheim glass is easy to maintain. We suggest cleaning with warm water and a lint free cloth (terry cloth). Conventional non-abrasive glass cleaners may also be used.

Testing:

Bendheim safety glass meets the requirements for ANSI Z97.1 & the Consumer Product Safety Commission CPSC 16FR, Part 1201 – Safety Standard for Architectural Glazing Materials.

Potential Leed Credit:


- EA Credit 1: Optimize Energy Performance
- IEQ Credit 8.1: Daylight & Views: Daylight 75% of Spaces
- IEQ Credit 8.2: Daylight & Views: Views for 90% of Spaces

Options & Customizations:

A wide range of custom colors & opacities:



Light-diffusing etched and textured surface options available:

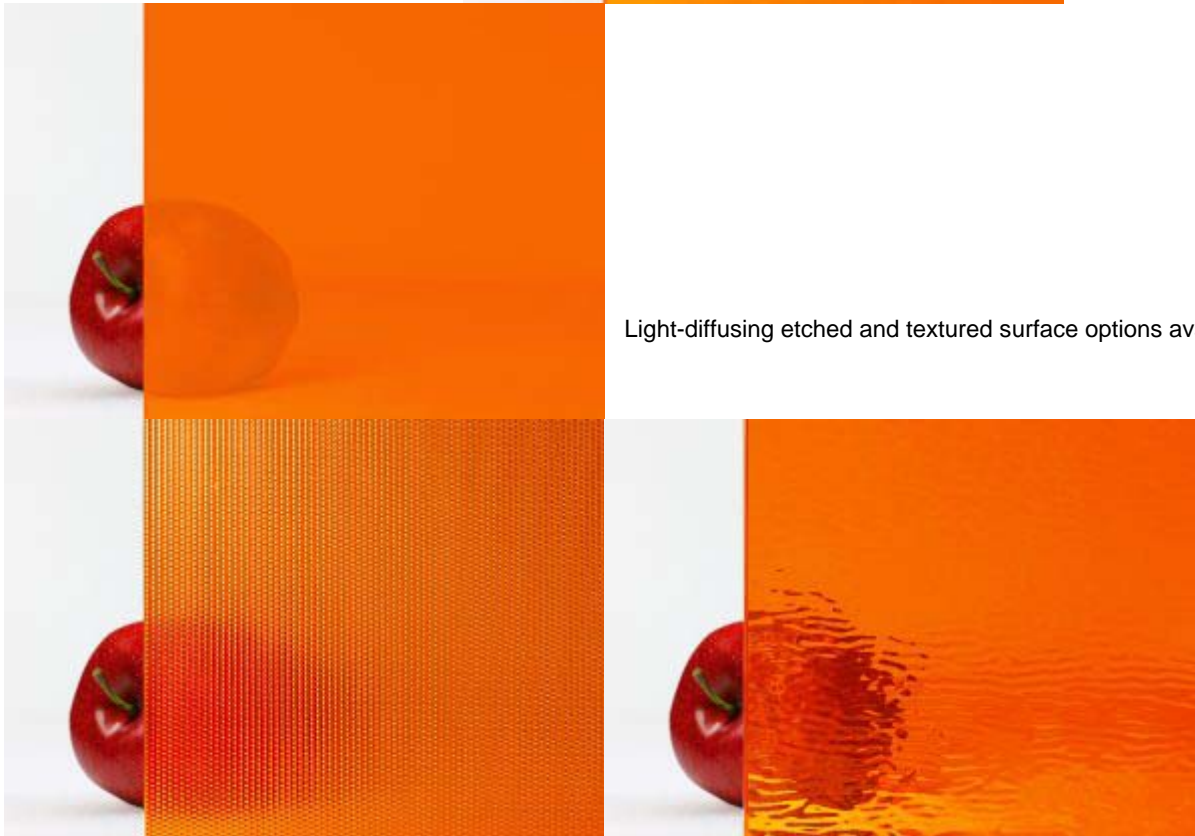

Laminated to

mirror for wall cladding applications Have a project requiring further customization? Please contact your local Bendheim representative to discuss your unique project and vision.