


## Lumi Frit™ | Projectable Surface 1 Frit Glass, Small Dot + Etch

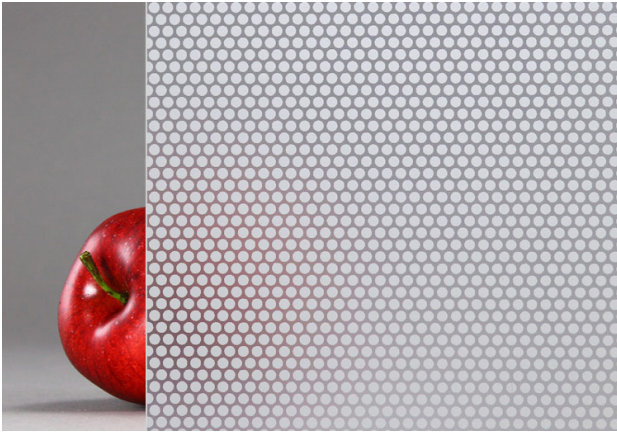

### Application:

Interior, Exterior

### Composition:

Low-iron glass, surface 1 ceramic frit

### Approx Dimensions:

Max. size = Based on design wind load. Please contact us for additional information at [rainscreens@bendheim.com](mailto:rainscreens@bendheim.com); laminated thicknesses range from 1/2" (12 mm) to 1" (24 mm).

### Approx Weight:

Varies by thickness; approx. 6 to 12 lb/ft² (30 to 60 kg/m²)

### Safety Options:

Tempered\_laminated

### Maintenance:

Bendheim glass is easy to maintain. We suggest cleaning with warm water or conventional non-abrasive glass cleaners. Installed in the smartly engineered Längle glazing clips, broken or damaged glass panels can be quickly and easily replaced without having to deglaze surrounding panels.

## Testing:

Bendheim safety glass meets the requirements for ANSI Z97.1 & the Consumer Product Safety Commission CPSC 16FR, Part 1201 – Safety Standard for Architectural Glazing Materials.

## Potential Leed Credit:

- IEQ Credit 8.1: Daylight & Views: Daylight 75% of Spaces
- IEQ Credit 8.2: Daylight & Views: Views for 90% of Spaces

## Options & Customizations:

- Virtually unlimited creative design possibilities, including custom patterns, colors, low-iron, and more