


Lumi Frit™ | Projectable Surface 1 Frit Glass, Medium Dot

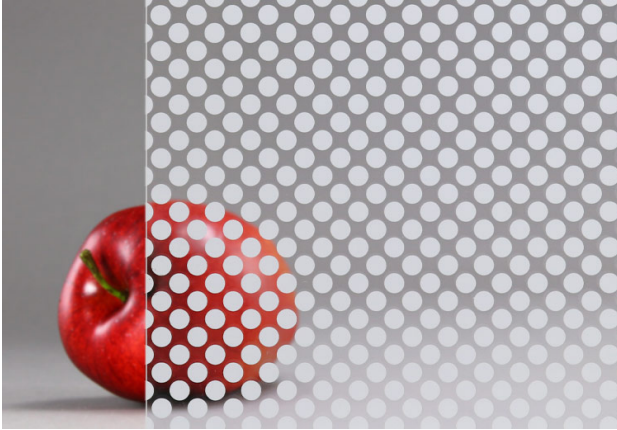

Application:

Interior, Exterior

Composition:

Low-iron glass, surface 1 ceramic frit

Approx Dimensions:

Max. size = Based on design wind load. Please contact us for additional information at rainscreens@bendheim.com; thicknesses range from 1/4" (6 mm) to 1/2" (12 mm).

Approx Weight:

Varies by thickness; 3 to 6 lb/ft² (14.5 to 32 kg/m²)

Safety Options:

Tempered, Tempered_laminated

Maintenance:

Bendheim glass is easy to maintain. We suggest cleaning with warm water or conventional non-abrasive glass cleaners. Installed in the smartly engineered Längle glazing clips, broken or damaged glass panels can be quickly and easily replaced without having to deglaze surrounding panels.

Testing:

Bendheim safety glass meets the requirements for ANSI Z97.1 & the Consumer Product Safety Commission CPSC 16FR, Part 1201 – Safety Standard for Architectural Glazing Materials.

Potential Leed Credit:

- IEQ Credit 8.1: Daylight & Views: Daylight 75% of Spaces
- IEQ Credit 8.2: Daylight & Views: Views for 90% of Spaces

Options & Customizations:

- Virtually unlimited creative design possibilities, including custom patterns, colors, low-iron, and more
- 1/2" (12 mm) glass available on special request