


Low-Iron Solar™ Textured Architectural Glass

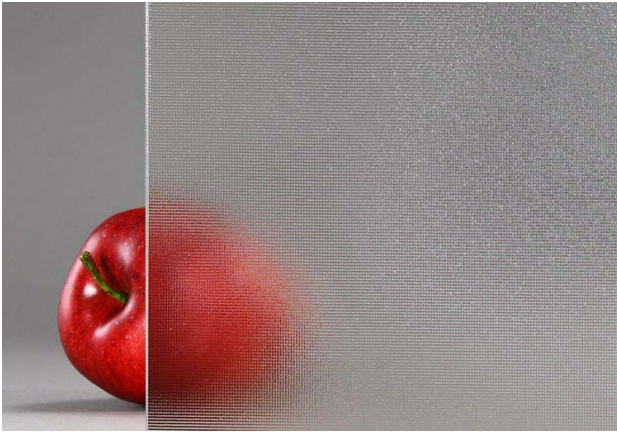

Application:

Interior, Exterior

Composition:

Low-iron glass

Approx Dimensions:

Cut-to-size; max. size and thickness depend on application, up to 80" x 130" (2 m x 3.3 m); thickness = 5/32" (4mm); greater thicknesses available through lamination

Approx Weight:

2 lb/ft² (10 kg/m²)

Safety Options:

Standard, Tempered, Laminated, Tempered_laminated

Maintenance:

Bendheim glass is easy to maintain. We suggest cleaning with warm water and a lint free cloth (terry cloth). Conventional non-abrasive glass cleaners may also be used.

Testing:

Bendheim safety glass meets the requirements for ANSI Z97.1 & the Consumer Product Safety Commission CPSC 16FR, Part 1201 – Safety Standard for Architectural Glazing Materials.

Options & Customizations:

- Laminated with a wide range of color interlayers
- Laminated in combination with other textured and etched glasses
- Back-painted in an unlimited range of colors, including metallics - only in tempered or laminated forms
- Laminated to mirror for wall cladding applications
- Tempered-and-laminated form for special applications
- Larger sizes, up to 72"x 129", on special request