


## EcoGlass™ “Cast” Textured Architectural Glass

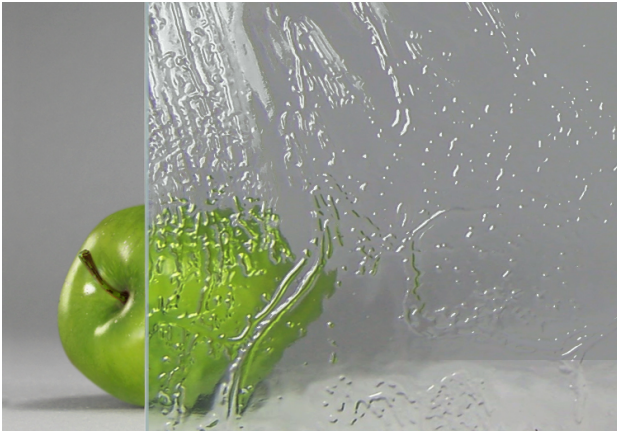

### Application:

Interior

### Composition:

Glass

### Approx Dimensions:

Cut-to-size; max. size = 72" x 96" (1.8 m x 2.4 m); thickness = 1/4" (6mm), 3/8" (10mm), and 1/2" (12 mm).

### Approx Weight:

Varies by thickness; ranges approx. 3 lb/ft<sup>2</sup> (14.5 kg/m<sup>2</sup>) to 6.5 lb/ft<sup>2</sup> (32 kg/m<sup>2</sup>) for monolithic (not laminated) glass

### Safety Options:

Standard, Tempered, Laminated, Tempered\_laminated

### Maintenance:

Bendheim glass is easy to maintain. We suggest cleaning with warm water and a lint free cloth (terry cloth). Conventional non-abrasive glass cleaners may also be used.

## Testing:

Bendheim safety glass meets the requirements for ANSI Z97.1 & the Consumer Product Safety Commission CPSC 16FR, Part 1201 – Safety Standard for Architectural Glazing Materials.

## Options & Customizations:

- Laminated with a wide range of color interlayers
- Laminated in combination with other textured and etched glasses
- Back-painted in an unlimited range of colors, including metallics
- Laminated to mirror for wall cladding applications
- Tempered-and-laminated form for special applications
- Larger sizes, up to 72"x 129", on special request