


## Z-KISS™ Concealed Interior Glass Cladding System

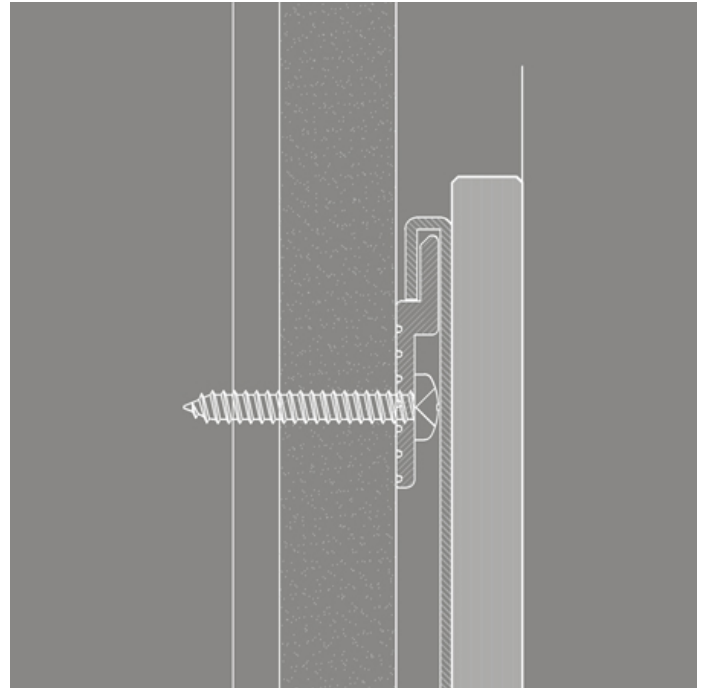

### Composition:

Galvanized steel and aluminum

### Application:

Interior

### Installation:

"Out-of-box" installation saves time and labor costs – only requires hand tools and proper wall-mounting screws based on your substrate (Sheetrock, concrete, brick, etc.)

### Approx Dimensions:

Z-KISS lays close to the wall, with approx. 5/16" depth + the thickness of the glass; Z-KISS width matches the width of the glass panel; steel profile height ranges from 3" to 7" (with integrated kick plate). Z-KISS is compatible with glass sizes up to 60" x 120" and glass thicknesses ranging from 1/4" to 1/2".

## Maintenance:

Durable metal system components do not require special maintenance.

## Testing:

Independently tested, exceeds the requirements for ASTM D1002 test for Lap Shear Strength.