


Z-KISS™ Concealed Interior Glass Cladding System

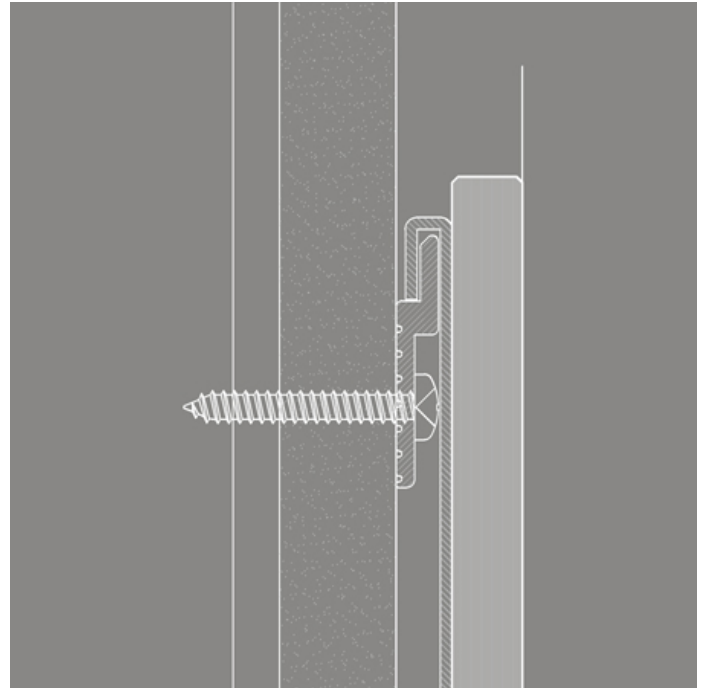

Composition:

Galvanized steel and aluminum

Application:

Interior

Installation:

“Out-of-box” installation saves time and labor costs – only requires hand tools and proper wall-mounting screws based on your substrate (Sheetrock, concrete, brick, etc.)

Approx Dimensions:

Z-KISS lays close to the wall, with approx. 5/16" depth + the thickness of the glass; Z-KISS width matches the width of the glass panel; steel profile height ranges from 3" to 7" (with integrated kick plate). Z-KISS is compatible with glass sizes up to 60" x 120" and glass thicknesses ranging from 1/4" to 1/2".

Maintenance:

Durable metal system components do not require special maintenance.