


## “Full” Restoration Glass® | “Antique” Window Glass

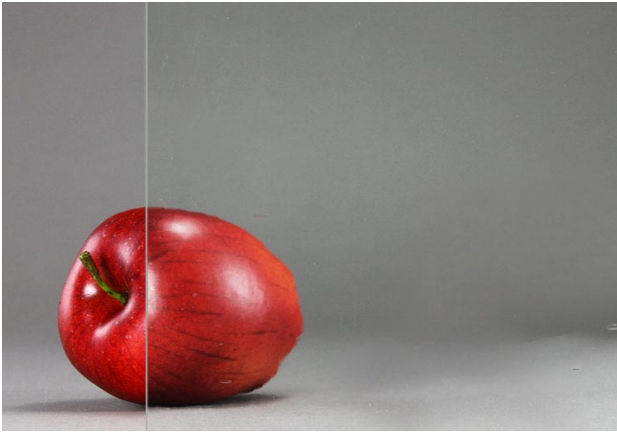

### Application:

Interior, Exterior

### Composition:

Glass

### Installation:

See installation instructions at [www.restorationglass.com/how-to-install.cfm](http://www.restorationglass.com/how-to-install.cfm). For laminated Restoration Glass®:

- Use only Neutral Cure Silicone Sealants.
- All gaskets, glazing materials, setting blocks, etc. must be compatible.
- Use only approved structural glazing.
- Do not use acid based sealants.
- Do not use solvent-base primers or other products prior to applying sealants.
- Do not use neoprene setting blocks.
- Do not use cleaners containing hydrocarbon solvents.

### Approx Dimensions:

Cut-to-size; approx. max. size = 23" x 35" (0.6 m x 0.9 m); approx. thickness for standard non-safety glass = 1/8" (3 mm) / laminated = 1/4" (6 mm); available in larger thicknesses through lamination

### Approx Weight:

1.5 lbs/ft<sup>2</sup> (7.3 kg/m<sup>2</sup>) monolithic or 3 lb/ft<sup>2</sup> (14.5 kg/m<sup>2</sup>) laminated

## Safety Options:

Standard, Laminated

## Maintenance:

Bendheim glass is easy to maintain. We suggest cleaning with warm water and a lint free cloth (terry cloth). Conventional non-abrasive glass cleaners may also be used.

## Testing:

Laminated Restoration Glass® is safety glass, meeting the requirements for ANSI Z97.1 & the Consumer Product Safety Commission CPSC 16FR, Part 1201 – Safety Standard for Architectural Glazing Materials.

## Potential Leed Credit:

- IEQ Credit 8.1: Daylight & Views: Daylight 75% of Spaces
- IEQ Credit 8.2: Daylight & Views: Views for 90% of Spaces

## Options & Customizations:

- "Light" Restoration Glass® - slightly less pronounced antique character, matches antique window glass of the 19th and early 20th centuries
- Restoration Mirror™ (mirrored version)

